


# USB - to - UART Converter

The USB to UART Converter is a tiny tool to connect the UART of a microcontroller to a standard USB host. The USB to UART Converter is based on a CP2102 form silabs, it converts data traffic between USB and UART formats.

## Features

<b>BAUD RATE</b>	300bps up to 1 Mbps user - programmable
<b>EEPROM</b>	1024 Bytes
<b>USB</b>	USB 2.0, full speed (12 Mbps)
<b>SUPPORT</b>	all modem interface singals

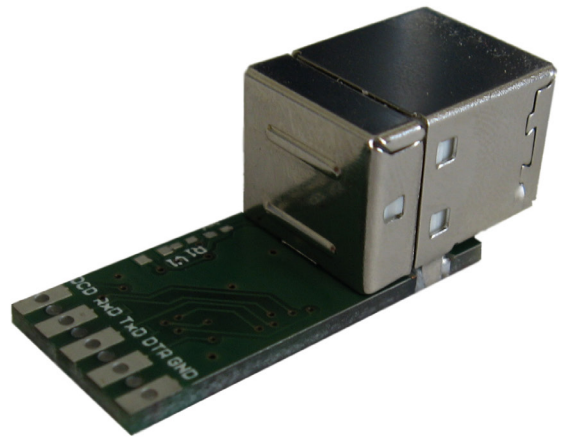

## Development Support

A Driver is available for Windows, Mac OS and Linux. Linux and Mac OS supports the USB - UART - Converter with a native driver. The Windows driver can be downloaded at <http://www.silabs.com>

## Electrical Characteristics

Input High Voltage min 2.0V  
Input Low Voltage max 0.8 V

BLUETECHNIX MECHATRONISCHE SYSTEME GMBH

Lainzerstraße 162/3  
1130 Wien, Austria  
[www.bluetechnix.com](http://www.bluetechnix.com)

Tel.: +43 (1) 9142091 x 0  
Fax.: +43 (1) 9142091 x 99  
Email: [office@bluetechnix.at](mailto:office@bluetechnix.at)

